



SuiteCRM Email2Lead

Installation Guide


Pre-requisites

Please follow the below steps before installing the Email Parser


1. Log in as an Administrator.
2. Verify the CRM version should be compatible with Email To Lead.
3. CRM should have the Outright utils version 10, if not then install the OutrightUtils package first then install the Email2Lead.
4. You must have a Group Inbound account to configure the Email Parser.
5. Cron Job must be set up in CRM.

Installation Guide:-


1. Go to the Administration page.
2. Click on “**Module Loader**” to install the package.

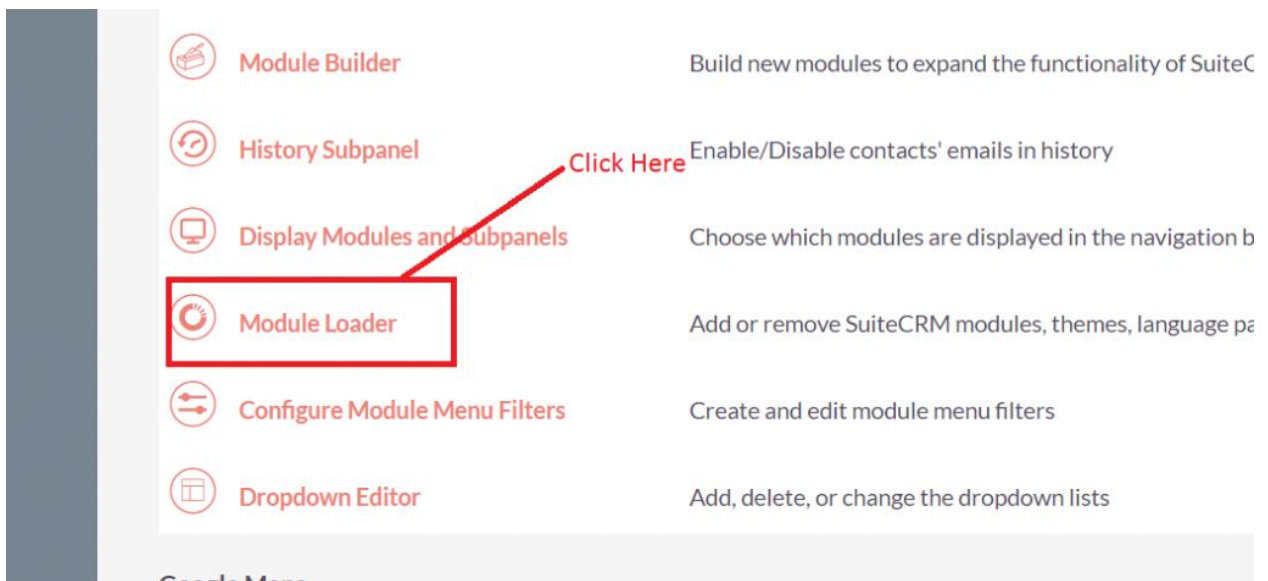


3. Click on the "Choose File" button and select the Record Receiver.zip.

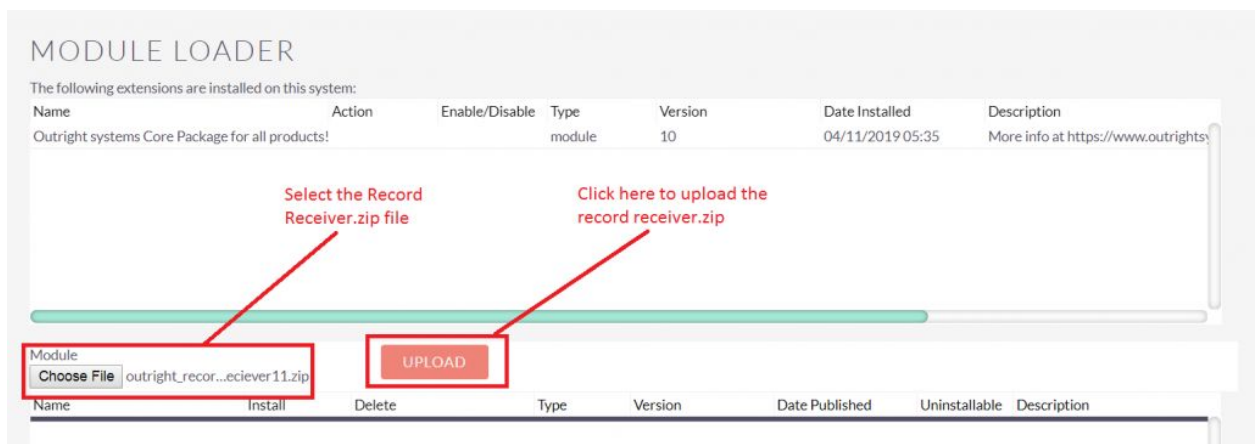


4. Click on "Upload" to upload the file in CRM and then click on the Install button.

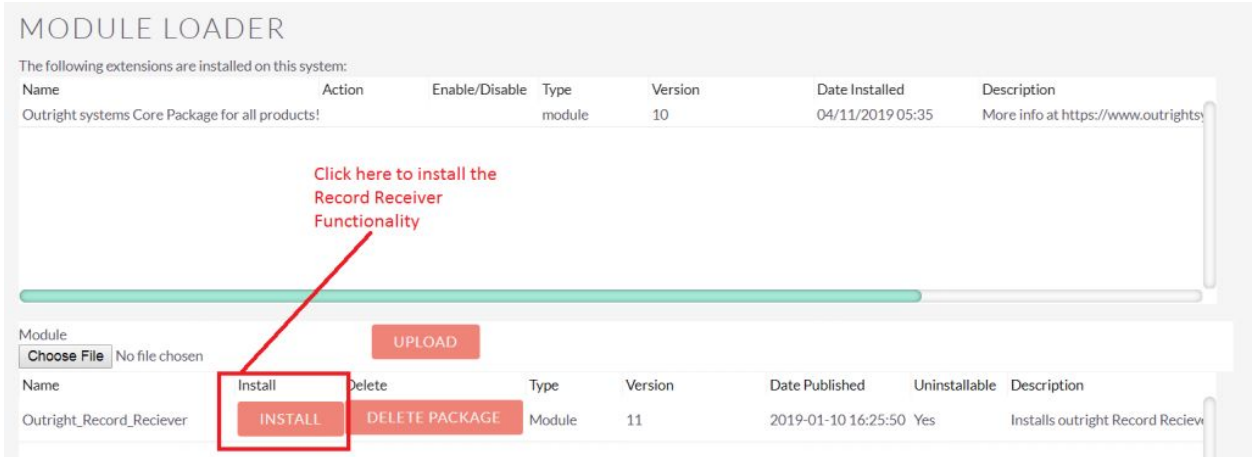

5. Again go to the Administration page and click on repair.

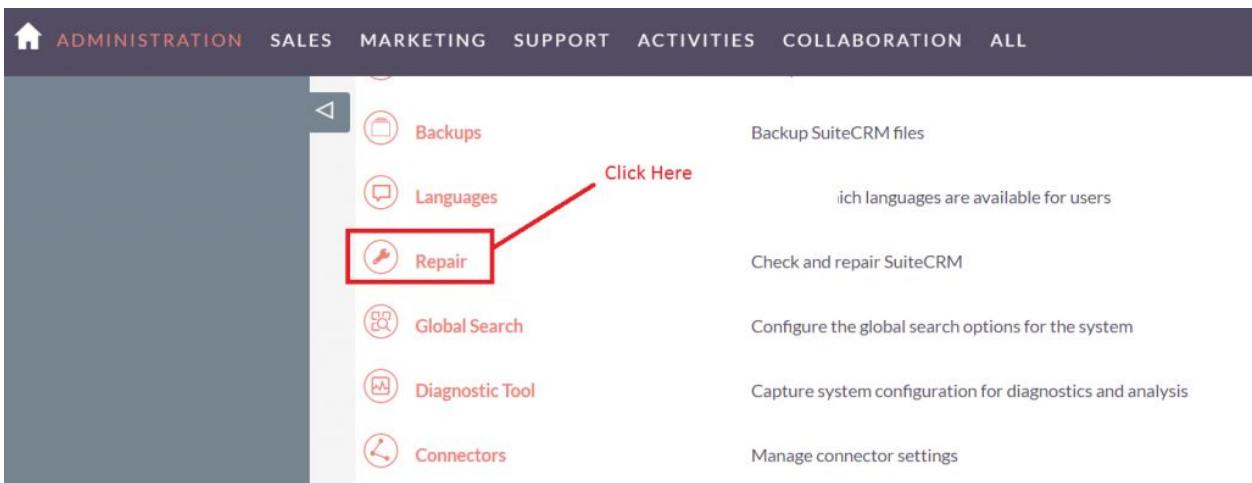

6. Click on "Quick Repair and Rebuild" and click on the execute button.

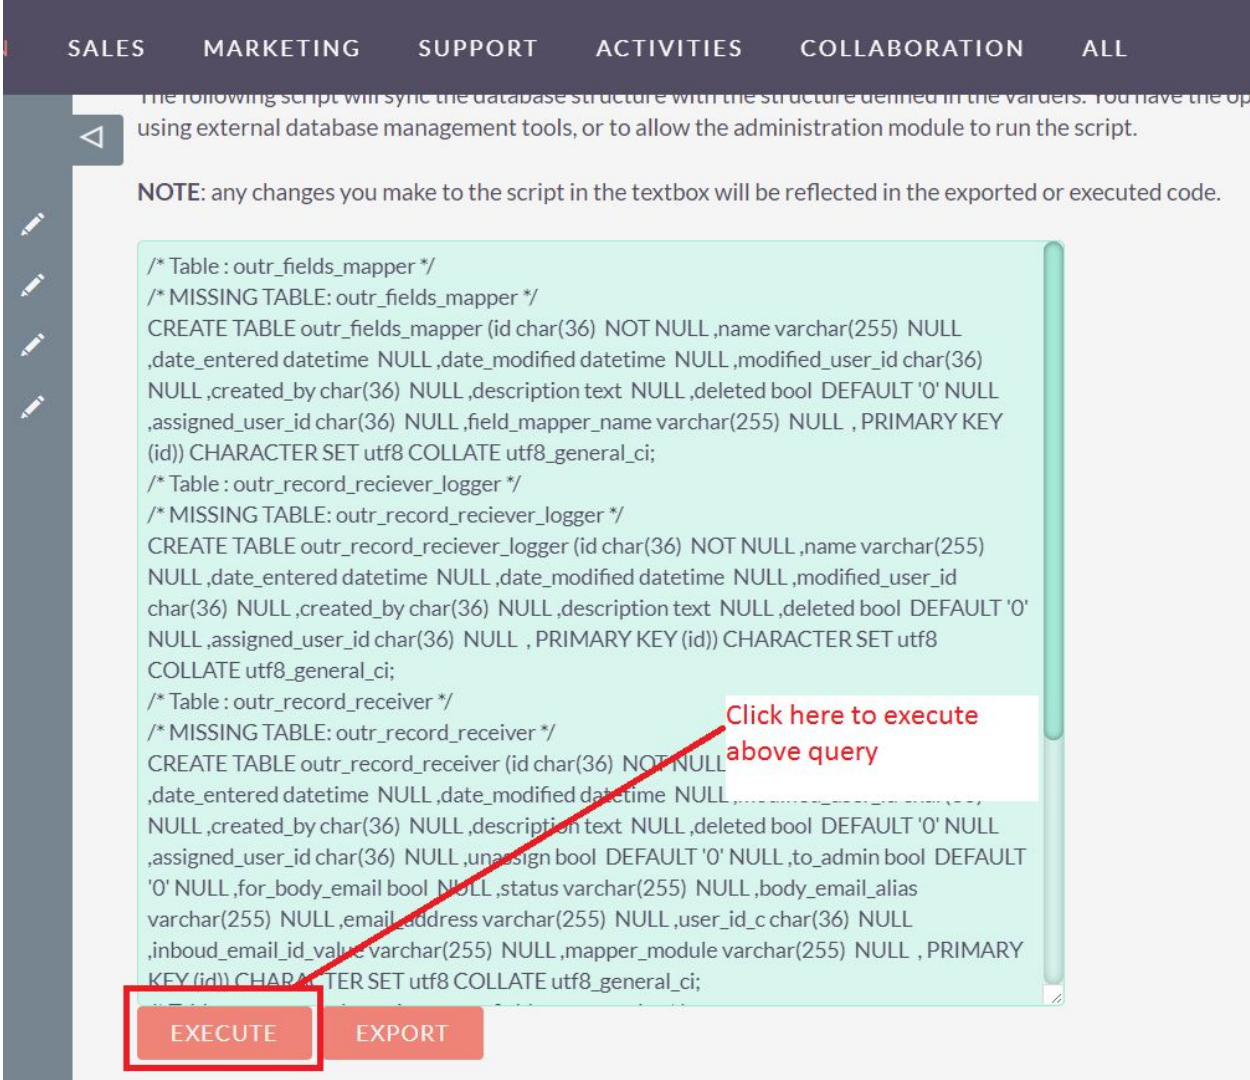

The screenshot shows a database management interface with a dark header containing navigation tabs: SALES, MARKETING, SUPPORT, ACTIVITIES, COLLABORATION, and ALL. Below the header, there is a text area containing a SQL script. The script defines three tables: outr_fields_mapper, outr_record_reciever_logger, and outr_record_receiver. The script is as follows:

```
/* Table : outr_fields_mapper */
/* MISSING TABLE: outr_fields_mapper */
CREATE TABLE outr_fields_mapper (id char(36) NOT NULL ,name varchar(255) NULL
,date_entered datetime NULL ,date_modified datetime NULL ,modified_user_id char(36)
NULL ,created_by char(36) NULL ,description text NULL ,deleted bool DEFAULT '0' NULL
,assigned_user_id char(36) NULL ,field_mapper_name varchar(255) NULL , PRIMARY KEY
(id)) CHARACTER SET utf8 COLLATE utf8_general_ci;
/* Table : outr_record_reciever_logger */
/* MISSING TABLE: outr_record_reciever_logger */
CREATE TABLE outr_record_reciever_logger (id char(36) NOT NULL ,name varchar(255)
NULL ,date_entered datetime NULL ,date_modified datetime NULL ,modified_user_id
char(36) NULL ,created_by char(36) NULL ,description text NULL ,deleted bool DEFAULT '0'
NULL ,assigned_user_id char(36) NULL , PRIMARY KEY (id)) CHARACTER SET utf8
COLLATE utf8_general_ci;
/* Table : outr_record_receiver */
/* MISSING TABLE: outr_record_receiver */
CREATE TABLE outr_record_receiver (id char(36) NOT NULL ,date_entered datetime NULL ,date_modified datetime NULL ,modified_user_id char(36) NULL ,created_by char(36) NULL ,description text NULL ,deleted bool DEFAULT '0' NULL ,assigned_user_id char(36) NULL ,unassign bool DEFAULT '0' NULL ,to_admin bool DEFAULT '0' NULL ,for_body_email bool NULL ,status varchar(255) NULL ,body_email_alias varchar(255) NULL ,email_address varchar(255) NULL ,user_id_c char(36) NULL ,inbound_email_id_value varchar(255) NULL ,mapper_module varchar(255) NULL , PRIMARY KEY (id)) CHARACTER SET utf8 COLLATE utf8_general_ci;
```

Below the script, there are two buttons: "EXECUTE" and "EXPORT". The "EXECUTE" button is highlighted with a red box. A red arrow points from the "EXECUTE" button to a text box that says "Click here to execute above query".